


CERTIFIED THERMOMELT® HEAT-STIK® — Nuclear pre-certified, accurate temperature indicating stick



Pre-certified to meet nuclear and military low-corrosion specifications for stainless-steel fabrication and other super alloys, the Markal® Certified Thermomelt® HEAT-STIK® is a quick method to accurately measure metal surface temperatures and equipment. The 20 available temperatures are lot traceable for jobsite documentation. Please note that the color of the Thermomelts are not a part of their function, since the temperature signal consists of melting. Indicator color is subject to change without notice.

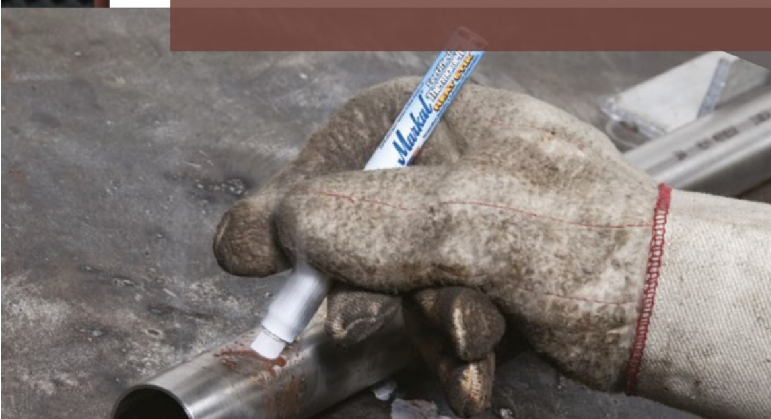

- Certified to meet the following U.S.A. and international specifications: LOW CORROSION, propriétés types :
 - EDF PMUC
 - MIL-STD-2041D
 - U.S DOE RDT F-7-3T (expired)
 - U.S Navy C3070
- Engineered to meet:
 - 200 ppm total halogens
 - 250 ppm each low melting point metals
 - 300 ppm total low melting point metals
 - 200 ppm sulfur
- Individual lot analysis and certification available at www.markal.com/certified for quick, accurate reference
- Protective holder, shirt-clip and adjustment ring prevents breakage and improves handling

DETAILS

THERMOMELT® HEAT-STIK®

	°C	°F		°C	°F
86400	38 °C	100 °F	86769*	232 °C	450 °F
86436*	52 °C	125 °F	86787*	246 °C	475 °F
86463*	66 °C	150 °F	86805*	260 °C	500 °F
86481*	79 °C	175 °F	86823*	288 °C	550 °F
86517*	93 °C	200 °F	86841	316 °C	600 °F
86526	101 °C	213 °F	86859*	343 °C	650 °F
86544*	107 °C	225 °F	86868	371 °C	700 °F
86562*	121 °C	250 °F	87021	774 °C	1425 °F
86589*	135 °C	275 °F	86402	50 °C	
86625*	149 °C	300 °F	86401	100 °C	
86661*	163 °C	325 °F	84664	150 °C	
86697*	177 °C	350 °F	86516	200 °C	
86715*	191 °C	375 °F	86563	250 °C	
86733*	204 °C	400 °F	86734	400 °C	
86751*	218 °C	425 °F	86977	1200 °C	

THERMOMELT® HEAT-STIK® CERTIFIED

	°C	°F		°C	°F
89100*	38 °C	100 °F	89475*	246 °C	475 °F
89125*	52 °C	125 °F	89500*	260 °C	500 °F
89150*	66 °C	150 °F	89525*	274 °C	525 °F
89175*	79 °C	175 °F	89550*	288 °C	550 °F
89200*	93 °C	200 °F	89650*	343 °C	650 °F
89225*	107 °C	225 °F			
89250*	121 °C	250 °F			
89275*	135 °C	275 °F			
89300*	149 °C	300 °F			
89325*	163 °C	325 °F			
89350*	177 °C	350 °F			
89375*	191 °C	375 °F			
89400*	204 °C	400 °F			
89425*	218 °C	425 °F			
89450*	232 °C	450 °F			

* Indicates that this marker color is low in chlorides, halogens, and sulfurs for low corrosion marking requirements.